


CHAINS

FSQ

C-Class Combination Chains


"C" Class Combination Chains

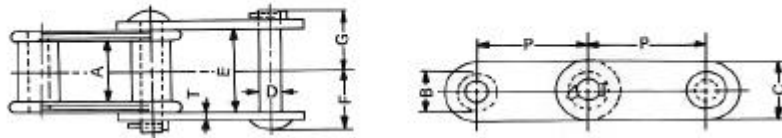

Chain No.	Average Pitch (in.)	No. of Links in 10 feet	Average Weight Per foot /Lbs	Max. Working Load/Labs	Average Ultimate Strength/Lbs	Max Width of Sprocket A	Barrel Dia. B	Sidebar Width C	Pin Dia. D	Coupling Pins		Side Bar Thickness T
										F	G	
C- 55	1.631	74	2.0	1,110	9,000	11/16	23/32	3/4	3/8	29/32	1-1/16	3/16
C- 77	2.308	52	2.3	1,360	11,000	11/16	23/32	7/8	7/8	1-5/64	1-1/32	3/16
C- 102B	4.000	30	6.8	4,000	24,000	2	1	1-1/2	1-1/2	2-7/32	2-1/4	3/8
C- 102-1/2	4.040	30	9.7	5,550	36,000	2	1-3/8	1-3/4	1-3/4	2-9/32	2-1/2	3/8
C- 110	6.000	20	6.0	4,000	24,000	1-15/16	1-9/32	1-1/2	1-1/2	2-5/32	2-5/16	3/8
C- 111	4.760	25-1/2	9.8	5,950	36,000	2-3/8	1-7/16	1-3/4	1-3/4	2-15/32	2-21/32	3/8
C- 131	3.057	39	6.5	3,220	24,000	1-1/8	1-1/4	1-1/2	1-1/2	2-23/32	1-19/32	3/8
C- 132	6.050	20	14.5	8,330	50,000	3-1/8	1-25/32	2	2	3-1/8	3-3/8	1/2
C- 188	2.609	46	3.6	1,950	14,000	15/16	7/8	1-1/8	1-1/8	1-9/32	1-13/32	1/4

H-Class Mill Chains


"H" Class Mill Chains

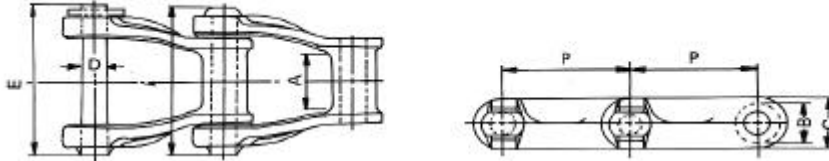

Chain No.	Average Pitch (in.)	No. of Links in 10 feet	Average Weight Per foot /Lbs	Max. Working Load/Labs	Average Ultimate Strength/Lbs	Max Width of Sprocket A	Barrel Dia. B	Sidebar Width C	Pin Dia. D	Coupling Pins E	Overall Width Riveted
											F
H- 60	2.308	52	2.1	1,170	7,000	3/4	3/4	3/4	5/16	2-11/16	1-1/16
H- 74	2.609	46	3.0	1,580	10,000	1	7/8	1	3/8	3	1-1/32
H- 78	2.609	46	4.2	2,380	16,000	1-1/8	7/8	1-1/8	1/2	3-1/4	2-1/4
H- 82	3.075	39	5.5	3,080	20,000	1-1/4	1-7/32	1-1/4	9/16	4	2-1/2
H- 124	4.000	30	8.0	5,000	30,000	1-5/8	1-7/16	1-9/16	3/4	5-3/16	2-5/16

Single Strand Roller Chains

Single Strand Roller Chains

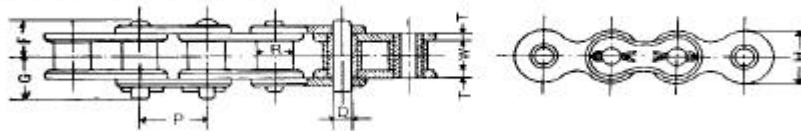

Chain No.	Pitch P	Roller	Average	Plate		Pin Dia. D	Overall Width		Average Ultimate Strength Lbs.
		Width W	Dia. R	Height H	Thickness T		F	D	
H- 60	1.631	74	2.0	1,110	9,000	11/16	23/32	3/4	3/8
H- 74	2.308	52	2.3	1,360	11,000	11/16	23/32	7/8	7/8
H- 78	4.000	30	6.8	4,000	24,000	2	1	1-1/2	1-1/2
H- 82	4.040	30	9.7	5,550	36,000	2	1-3/8	1-3/4	1-3/4
H- 124	6.000	20	6.0	4,000	24,000	1-15/16	1-9/32	1-1/2	1-1/2

Other types are available, please contact with fsqsales@fairfriend.com.tw